

# GENESIS OPAL

## UNENCLOSED VERTICAL PLATFORM LIFT



The Garaventa Genesis OPAL model is a reliable, cost effective accessibility solution. This ADA compliant lift is for indoor or outdoor use, and for public or private buildings with lifting heights up to 5 feet (commercially). This lift is a short rise vertical elevating system that can be installed directly on the floor or in a pit. The OPAL consists of a platform with 1100mm (43") high side walls, an upper gate, a platform mounted lower landing gate, a drive system and easy-to-use operating controls. The platform walls and the lower platform gate travel with the platform creating a barrier around the passenger.

**Note:** The installation of unenclosed platform lifts for public building use varies depending on local codes and the type of application. Contact your local Garaventa Lift dealer for information regarding the use of this product in your area.

# GENESIS OPAL



Need Design Assistance?

Call your local Garaventa Lift representative or our Design Hotline at 1.800.663.6556

## TECHNICAL INFORMATION

### Rated Load of 340 kg (750 lbs)

	Standard	Optional
<b>Platform size</b>	914mm x 1242mm (36" x 48 7/8")	Mid-Size Platform: 914mm x 1394mm (36" x 54 7/8")*  Large Platform: 1100mm x 1546mm (43 1/4" x 60 7/8")*
<b>Configuration</b>	Straight through entry/exit	90° entry/exit
<b>Warranty</b>	2 years	Five additional years (*Contact Garaventa)
<b>Accessories</b>	Keyless operation  Grabrail on platform side wall  Audible Illuminated Emergency Stop/ Alarm Switch	Autodialer phone  Emergency battery lowering (Leadscrew drive only)  Illuminated and tactile directional buttons  Power gate operator  Keyed call station and platform controls  Stationary loading ramp or platform mounted automatic folding ramp for installations without a pit  Electrical disconnect
<b>Drive System</b>	Leadscrew: 2 HP motor, travel speed at 3 meters (10 ft) per minute.  Hydraulic: 3 HP motor Continuous Mains Powered with an auxiliary power system. Lift travels at 5.2 meters (17 ft) per minute.	Hydraulic (full time battery operation): 3 HP 24VDC hydraulic motor lifts the platform at 5.2 meters (17 ft) per minute.

### Power Requirements

#### Leadscrew:

(Limited to residential use in Canada)  
North America: 120 VAC single phase on a dedicated 20 amp circuit  
International: 208-240 VAC single phase on a dedicated 16 amp circuit

#### Hydraulic:


North America: 120 VAC single phase on a dedicated 15 amp circuit  
International: 208-240 VAC single phase on a dedicated 15 amp circuit

#### Finishes:

Steel panels and framework are finished with electrostatically applied baked fine textured satin grey paint. The panels, gates and mast are framed with champagne anodized aluminum extrusions.

### Footprint/ Clearance Dimensions

Straight Through Entry / Exit				
Platform Size	Footprint Width	Footprint Length	Pit Width	Pit Length
Standard	1258mm 49 1/2"	1296mm (51")	1319mm (52")	1334mm (52 1/2")
Mid-Size	1258mm 49 1/2"	1448mm (57")	1319mm (52")	1493mm (58 1/2")
Large	1445mm 56 7/8"	1600mm (63")	1508mm (59 3/8")	1645mm (64 1/2")
90° Entry / Exit				
Large	1445mm (56 7/8")	1600mm (63")	1464mm (57 5/8")	1683mm (66 1/4")

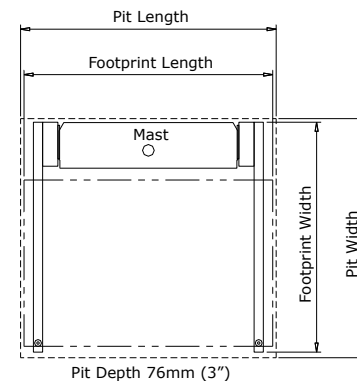

\*If a pit is used, recommended depth is 76mm (3"). Pit width and length include running clearances.

### Contact us today

Phone: +1 604 594-0422  
Toll Free: 1 800 663 6556  
Web site: [www.garaventalift.com](http://www.garaventalift.com)

Printed in Canada  
15806-N-PB

© Garaventa Lift. As we are continuously improving our products, specifications outlined in this brochure are subject to change without notice.

Authorized Garaventa Lift Representative